




ags<sup>TM</sup>

COMMERCIAL  
DOUBLE HUNG WINDOW

CAPRAL  
ALUMINIUM

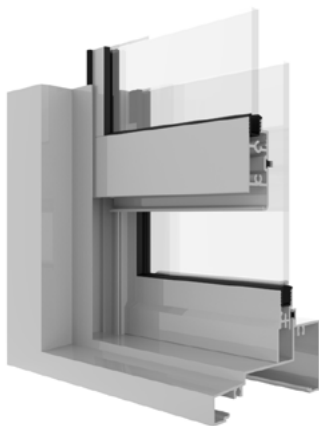

## AGS DOUBLE HUNG WINDOW

The AGS 481 Double Hung window incorporates the features and flexibility of a residential window system into the commercial grade AGS 400 Narrowline framing system.

The AGS 481 Double Hung is particularly suited to architectural applications where a more substantial, commercial appearance is desired. Featuring a 200 Pascal water performance and accepting single glazing up to 10.38mm, the AGS 481 Double Hung also incorporates standard features such as full width integrated finger pulls on the upper and lower sashes which aid the ease of operation and delivers double sash functionality in a modern and bold external framing system.

### FEATURES AND BENEFITS

- Bold 101.6mm outer frame for commercial and architectural applications
- Integrated head and sill design for neat, clean appearance
- Lockable hardware options
- Continuous integrated finger pulls for ease of operation
- Friction feet make adjusting the window's operation simple
- Compatible with a range of AGS suites
- Residential perimeter frame available (Urban 281)
- Double glazed sashes available with the use of adaptors
- Double glazed sidelights
- Sash restriction is available



Capral's AGS range is extruded in Australia using LocAL<sup>®</sup> Green primary aluminium.

- 50% lower-carbon emissions than global averages for primary aluminium
- 8kg CO<sub>2</sub>e/kg Al
- ASI Certified Smelter



1800 ALUMINIUM (258 646)  
 capral.com.au  
 Capral Limited ABN 78 004 213 692  
 April 2023

### MAXIMUM PERFORMANCE\*

Serviceability Pressure	3000Pa
Ultimate Pressure	4500Pa
Water Penetration - Static	200Pa

### FRAME DIMENSIONS

Height	44mm
Depth	101.6mm

### MAXIMUM RECOMMENDED SIZE

Sash Height	1200mm
Sash Width	1200mm
Weight	22kg

### GLAZING CAPACITY

Single Glazed	3-6mm
Double Glazed	10mm, 16mm & 18mm

### ACOUSTIC RATING

Acoustic (Max)	31 (-1:1)
----------------	-----------

\* Based on 481 & 581 test data

### WINDOW ENERGY RATINGS

Window ID	Glazing	Uw	SHGC	Tw	Air Inf
CAP-070-001	4Clr	6.5	0.67	0.69	0.39
CAP-070-002	6AzTS21	5.8	0.23	0.12	0.39
CAP-070-003	6SpGy	6.5	0.29	0.07	0.39
CAP-070-004	6.38CPNtl	4.9	0.41	0.45	0.39
CAP-070-005	6.38CPGy	4.9	0.40	0.30	0.39
CAP-163-001	4Clr/10/4Clr	4.4	0.58	0.60	0.61
CAP-163-002	4ET/10/4Clr	3.9	0.49	0.55	0.61
CAP-163-003	4Clr/10Ar/4Clr	4.3	0.58	0.60	0.61
CAP-163-004	4ET/10Ar/4Clr	3.7	0.49	0.55	0.61
CAP-163-005	6SpGn/6Ar/6SpGn	4.4	0.29	0.33	0.61
CAP-163-006	6SpGn/6/6SpGn	4.6	0.29	0.33	0.61

View full list of Residential and Commercial WERS rating at [capral.com.au](http://capral.com.au)