



ags™


COMMERCIAL
600 NARROWLINE
SINGLE GLAZED (150MM)

CAPRAL
ALUMINIUM



AGS 600 NARROWLINE SINGLE GLAZED (150mm)

The AGS 600 Narrowline offers an increased level of structural performance over the AGS 400 Narrowline with its bold 150mm frame depth and increased 50mm face dimension. The system can accommodate glazing up to a thickness of 12mm and accepts a number of AGS door and window options.

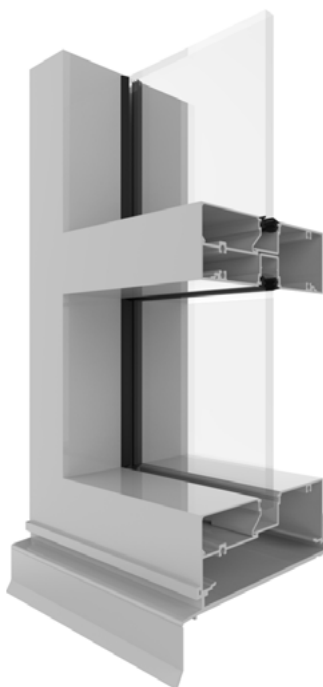

FEATURES AND BENEFITS

- Bold 150mm x 50mm centre glazed framing system
- Suits most commercial applications requiring more strength than the AGS 400 Narrowline
- Crisp, unbroken lines for clean aesthetics
- Can accommodate glazing up to 14mm in thickness
- Various mullion options for design flexibility
- Sub-frame options
- Compatible door and window suites available
- Internal and externally beaded options
- Captive glazing wedge options for easier on-site glazing



Capral's AGS range is extruded in Australia using LocAl® Green primary aluminium.

- 50% lower-carbon emissions than global averages for primary aluminium
- 8kg CO₂e/kg Al
- ASI Certified Smelter



1800 ALUMINIUM (258 646)
capral.com.au
Capral Limited ABN 78 004 213 692
January 2022

MAXIMUM PERFORMANCE

Serviceability Pressure	4500Pa
Ultimate Pressure	10900Pa
Water Penetration	900Pa

FRAME DIMENSIONS

Depth	150mm
Height	50mm

MAXIMUM RECOMMENDED SIZE

Height	4000mm
Width	2200mm

GLAZING CAPACITY

Single Glazed	6-14mm
---------------	--------

WINDOW ENERGY RATINGS

Window ID	Glazing	Uw	SHGC	T _{ww}	Air Inf
CAP-075-01	6Clr	6.3	0.75	0.79	0.12
CAP-075-02	6SpGy	6.3	0.32	0.08	0.12
CAP-075-03	6EcAd	4.6	0.57	0.60	0.12
CAP-075-04	6.38ClrLam	6.2	0.74	0.80	0.12
CAP-075-06	6HL139	4.4	0.55	0.59	0.12
CAP-075-08	638CPGy	4.4	0.45	0.35	0.12
CAP-075-09	638CPClr	4.4	0.62	0.74	0.12
CAP-075-10	6ET	4.4	0.63	0.73	0.12
CAP-075-12	10.38Clr Lam	6.1	0.69	0.78	0.12
CAP-075-13	6SolT	4.4	0.49	0.57	0.12
CAP-075-15	6SnGy	4.8	0.39	0.31	0.12

View full list of Residential and Commercial WERS rating at capral.com.au