




ags[™]

COMMERCIAL
LOUVRE ADAPTOR

CAPRAL
ALUMINIUM

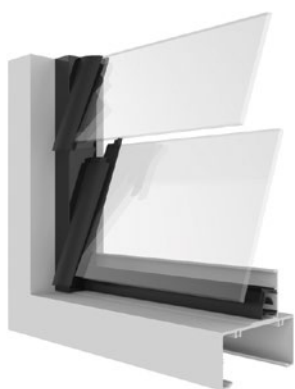

AGS COMMERCIAL LOUVRE ADAPTOR

The AGS Commercial Louvre Adaptor gives you the flexibility you need to create a high-performance louvre window with a clean architectural finish.

Simply pair the AGS Commercial Louvre Adaptor with any AGS Commercial framing system to convert it into a louvre window with ease.

Once installed, framing systems are compatible with both our manual and automatic louvre gallery variants, allowing you to choose between multiple blade, handle style and screening options to suit your requirements.

FEATURES AND BENEFITS

- An extremely simple system consisting of two extrusions
- Extrusions can be fitted to any of Capral's commercial framing systems, converting the configuration to a louvre window
- When paired with the AGS 619 Flushline 150mm Single Glazed range, the result is a very clean architectural style window, which provides clearance to fully open the 152mm louvre blades behind the fully integrated fly/security screen
- Adaptors are compatible with the full range of Ventus Louvre Galleries



Capral's AGS range is extruded in Australia using LocAL[®] Green primary aluminium.

- Significantly lower carbon emissions than global averages for primary aluminium
- ASI Certified Smelter



Capral utilises a Mass Balance System in line with ISO 20095:2020 Chain of Custody to manage its LocAL Products. CO₂e emissions stated are ex smelter based on kilograms emitted per kilogram of aluminium produced - Aluminium Smelting and Casting, International Aluminum Institute (IAI)



1800 ALUMINIUM (258 646)
capral.com.au
Capral Limited ABN 78 004 213 692
November 2025

MAXIMUM PERFORMANCE

Serviceability Pressure*	
Ultimate Pressure	8000Pa
Water Penetration	450Pa

* Refer to relevant commercial framing system manual

FRAME DIMENSIONS

	Depth	Height
SG Flushline	150mm	50mm

* Can also be used with any commercial framing system

MAXIMUM RECOMMENDED SIZE

	Width	Height
Glass/Flat Blade	900mm	2980mm
Curved Blade	1400mm	2980mm

LOUVRE BLADE DETAILS

6mm Glass	102mm or 152mm
Elliptical Aluminium	102mm or 152mm
Flat Aluminium	152mm

ACOUSTIC RATING

Single Louvre (Max)	27 (0;-1)
Double Louvre (Max)	38 (-1;-5)

WINDOW ENERGY RATINGS

Window ID	Glazing	Uw	SHGC	T _w	Air Inf
CAP-527-01	6Clr	6.20	0.51	0.53	
CAP-527-02	6ET	4.90	0.43	0.49	
CAP-527-03	6ETGy	5.00	0.30	0.24	
CAP-527-04	6Gy	6.20	0.36	0.25	
CAP-527-05	6LgtGy	6.20	0.41	0.37	

View full list of Residential and Commercial WERS rating at capral.com.au