




COMMERCIAL
900 SLIDING DOOR

CAPRAL
ALUMINIUM

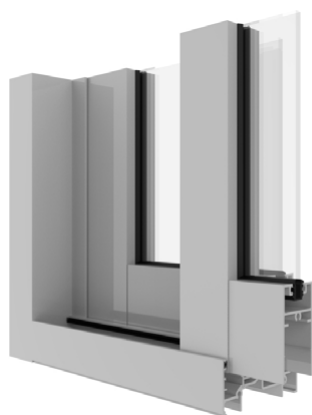

AGS COMMERCIAL 900 SLIDING DOOR

Specifically designed to deliver unrivalled performance, the AGS Commercial 900 Series Sliding Door is capable of panel sizes up to 3000mm in height and 2500mm in width with multi-stack configurations available to maximise its design flexibility.

Incorporating high quality hardware including heavy duty double wheel rollers and various locking options, the AGS Commercial 900 Series Sliding Door is built to succeed in both commercial and residential development projects.

FEATURES AND BENEFITS

- Suited to almost any commercial or architectural application
- Product limitations to suit large configurations and uses
- Standard and multi-stack configurations
- Configurable with linear grate drain for either internal and external sliding setups
- Standard rolling and ZTS rolling options available
- Optional Volta Power Assist Rollers
- Compatible with Caprio and Caprice mortice and surface-mounted hardware
- Available with highlight and sidelight options
- Corner, cavity and screen solutions
- Bushfire rated to BAL-40
- Tested to AS1170.2 cyclonic debris requirements up to an impact speed of 38m/s
- Standard and narrow interlocks available



Capral's AGS range is extruded in Australia using LocAL[®] Green primary aluminium.

- 50% lower-carbon emissions than global averages for primary aluminium
- 8kg CO₂e/kg Al
- ASI Certified Smelter



1800 ALUMINIUM (258 646)
capral.com.au
Capral Limited ABN 78 004 213 692
April 2024

MAXIMUM PERFORMANCE

Serviceability Pressure	6000Pa
Ultimate Pressure	10500Pa
Water Penetration	700Pa

FRAME DIMENSIONS

Depth	100mm/150mm/Stackable
Height	44mm/50mm/80mm

MAXIMUM RECOMMENDED SIZE

Panel Height	3000mm
Panel Width	2500mm
Panel Weight	300kg

GLAZING CAPACITY

Single Glazed	4-13.52mm
Thick Glazed	14-18mm
Double Glazed	19-26mm

ACOUSTIC RATING

Acoustics (Max)	39 (-1;-3)
-----------------	------------

WINDOW ENERGY RATINGS

Window ID	Glazing	Uw	SHGC	Tw	Air Inf
CAP-056-01	6Clr	6.3	0.63	0.66	0.37
CAP-056-02	6Gy	6.3	0.45	0.31	0.37
CAP-056-14	5Gy	6.3	0.48	0.36	0.37
CAP-056-23	10.38CPClr	4.6	0.50	0.60	0.37
CAP-056-24	10.38CPGy	4.6	0.38	0.29	0.37
CAP-057-01	6Clr/12/6Clr	3.9	0.55	0.59	0.37
CAP-057-03	6SpGy/12/6Clr	3.9	0.18	0.06	0.37
CAP-057-09	6Clr/12Ar/6Clr	3.8	0.55	0.59	0.37
CAP-057-10	6EG/12Ar/6Clr	3.8	0.32	0.35	0.37

View full list of Residential and Commercial WERS rating at capral.com.au