




ags™

COMMERCIAL

950 SLIDING WINDOW

CAPRAL  
ALUMINIUM

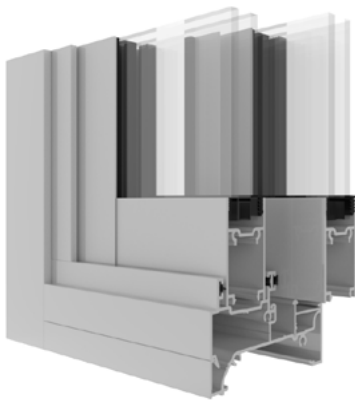

## AGS 950 SLIDING WINDOW

The AGS 950 Sliding Window system has been engineered to deliver high strength and performance. It has been tested to cyclonic requirements and is capable of large sash sizes and numerous configurations. Incorporating heavy duty roller hardware, twin point locking and integrated insect screening, the AGS 950 Sliding Window is ideally suited to applications where clean, modern aesthetics, high quality functionality and a range of performance options are demanded.

As would be expected with a window system of this calibre, double glazing is also available for improved thermal comfort and performance.

### FEATURES AND BENEFITS

- Ultra high performance design
- Extended product limitations for large configurations
- Tested to cyclonic requirements
- Tested to BAL-40
- High performance roller and locking hardware
- Slider over slider and slide-slide configurations
- Compatible with a range of AGS Commercial and Artisan Architectural suites
- Surface and mortice lock options are available from the Caprice hardware range



Capral's AGS range is extruded in Australia using LocAl® Green primary aluminium.

- 50% lower-carbon emissions than global averages for primary aluminium
- 8kg CO<sub>2</sub>e/kg Al
- ASI Certified Smelter



1800 ALUMINIUM (258 646)  
 capral.com.au  
 Capral Limited ABN 78 004 213 692  
 June 2023

### MAXIMUM PERFORMANCE

Serviceability Pressure	7000Pa
Ultimate Pressure	10000Pa
Water Penetration	800Pa

### FRAME DIMENSIONS

Option 1	101.6mm x 60mm
Option 2	101.6mm x 80mm
Option 3	100mm x 80mm
Option 4	150mm x 80mm

### MAXIMUM RECOMMENDED SIZE

Height	1800mm
Width	1200mm
Weight	64kg

### GLAZING CAPACITY

Single Glazed	4-10mm
Double Glazed	22 & 25mm

### ACOUSTIC RATING

Acoustic (Max)	36 (-1;-3)
----------------	------------

### WINDOW ENERGY RATINGS

Window ID	Glazing	Uw	SHGC	Tww	Air Inf
CAP-064-01	6Clr	6.5	0.59	0.6	0.23
CAP-064-02	6Gy	6.5	0.42	0.29	0.23
CAP-064-15	8Clr	6.4	0.55	0.59	0.23
CAP-064-13	10.38CPNtl	5.0	0.36	0.40	0.23
CAP-064-16	10.38CPGy	5.0	0.36	0.28	0.23
CAP-065-21	LB Clr5/12/5	3.6	0.42	0.54	0.23
CAP-065-01	6Clr/12/6Clr	4.4	0.51	0.54	0.23
CAP-065-02	6SpGy/12/6Clr	4.4	0.17	0.05	0.23
CAP-065-14	638CPGn/12Ar/6Clr	3.7	0.32	0.44	0.23
CAP-065-15	638CPClr/12Ar/6Clr	3.7	0.44	0.50	0.23

View full list of Residential and Commercial WERs rating at [capral.com.au](http://capral.com.au)